



SUBMITTAL DATA - CONTROLS
VEWCL1E
VRF INDIVIDUAL WIRED CONTROL

Job Name: _____
 Location: _____
 Schedule No.: _____
 System Designation: _____

Engineer: _____
 Architect: _____
 Date: _____
 For: ___ Reference ___ Approval ___ Review ___ Construction

Indoor Unit Wired Control

FEATURES AND FUNCTIONS

- Operation - On/Off
- Operation Mode - Auto / Cool / Dry / Heat / Fan
- 7-Day Programmable
- 7 levels of Fan speed
- Backlit LCD display for easy visibility
- Simultaneous control up to 16 indoor units
- Ambient Temperature display
- 24-hr timer
- Filter cleaning reminder
- Displays Error Codes
- Swing button for louver adjustment for ductless IDU
- Master IDU setting option

PHYSICAL APPEARANCE



ADVANCED (ENGINEERING) FUNCTIONS

- Compressor frequency
- High and Low Refrigerant Temperature (°C)
- EXV's Opening Angle
- Fan Motor frequency
- Compressor temperature sensor readings
- Oil return temperature

SPECIFICATIONS


PERFORMANCE

Communication Cabling	2 wires non-shielded
Cooling Setting Temperature	17 °C - 30 °C 63 °F - 86 °F
Heating Setting Temperature	16 °C - 29 °C 61 °F - 84 °F

DIMENSIONS

Unit Dimensions (in)	Height	4 1/2
	Width	4 1/2
	Depth	3/4

DIMENSIONAL DRAWINGS

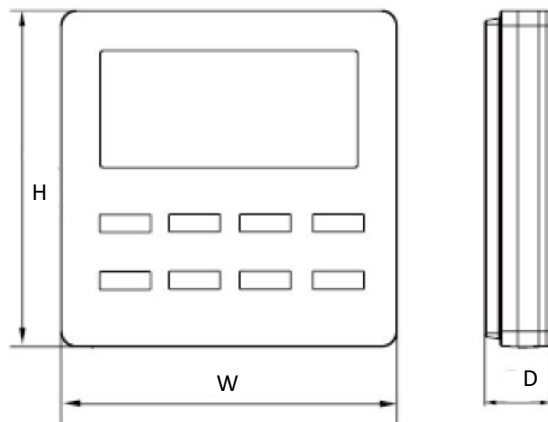

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency. ©2020 Lennox Industries Inc.