



**SUBMITTAL DATA - INDOOR UNIT**

**VE8C009N432U**

**VRF COMPACT 8-WAY CASSETTE TYPE EVAPORATOR (360°**

**Discharge)**

Job Name: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Schedule No.: \_\_\_\_\_  
 System Designation: \_\_\_\_\_

Engineer: \_\_\_\_\_  
 Architect: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 For: \_\_\_ Reference \_\_\_ Approval \_\_\_ Review \_\_\_ Construction

**FEATURES**

- Auto Addressing installation
- Auto Restart
- Replaceable Front Panel
- Integrated Condensate Pump
- Built-in Electronic Expansion Valve
- LED Display
- Water Overflow Protection
- Anti-Freezing Protection
- Wireless Control included

**PRODUCT WARRANTY**

All covered components - Five year limited warranty

**SPECIFICATIONS**

**PERFORMANCE**

|                           |        |        |
|---------------------------|--------|--------|
| Cooling Capacity* (Btu/h) |        | 9,550  |
| Heating Capacity* (Btu/h) |        | 10,920 |
| Airflow (CFM)             | High   | 335    |
|                           | Medium | 282    |
|                           | Low    | 247    |

Sound Pressure Level (dBA)                      H / M / L    36/33/28


**ELECTRICAL DATA**

|                            |                             |
|----------------------------|-----------------------------|
| Power Supply (V / Hz / Ph) | 220-240/50/1 - 208-230/60/1 |
| MOCP (A)                   | 6                           |
| Current Input (A)          | Cooling    0.15             |
|                            | Heating    0.15             |

**DIMENSIONS**

|                      |        |        |
|----------------------|--------|--------|
| Unit Dimensions (in) | Height | 10 1/2 |
|                      | Width  | 22 1/2 |
|                      | Depth  | 22 1/2 |

|                             |      |
|-----------------------------|------|
| Liquid Pipe Connection (in) | 1/4  |
| Gas Pipe Connection (in)    | 3/8  |
| Shipping Weight (lb)        | 49.6 |
| Net Weight (lb)             | 38.6 |

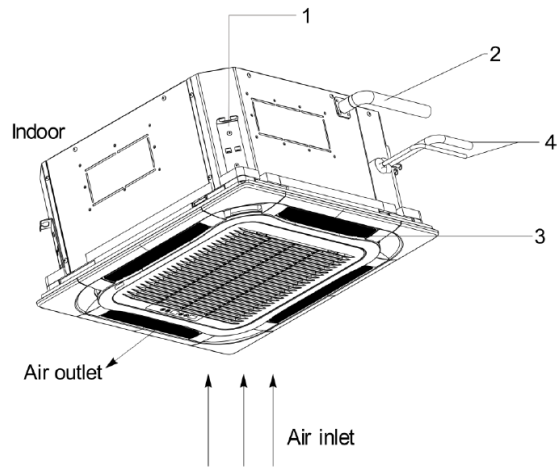

1. Location EXV
2. Drain
3. Louvers
4. Refrigerant Piping

**NOTES:**

\*Cooling and Heating Capacity data is rated at the following conditions:

Cooling: 80 °F DB / 67 °F WB Indoor, 95 °F DB Outdoor



Heating: 70 °F DB Indoor, 47 °F DB

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency. ©2019 Lennox Industries Inc.



**SUBMITTAL DATA - INDOOR UNIT**  
**VE8C009N432U**  
**(Y CASSETTE TYPE EVAPORATOR (360° Discharge))**

**DIMENSIONAL DRAWINGS**

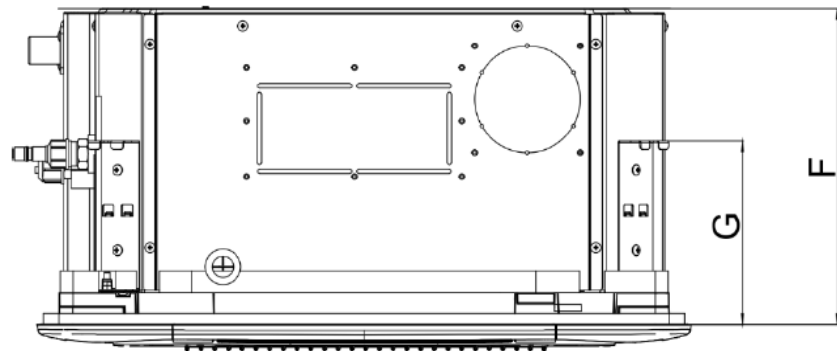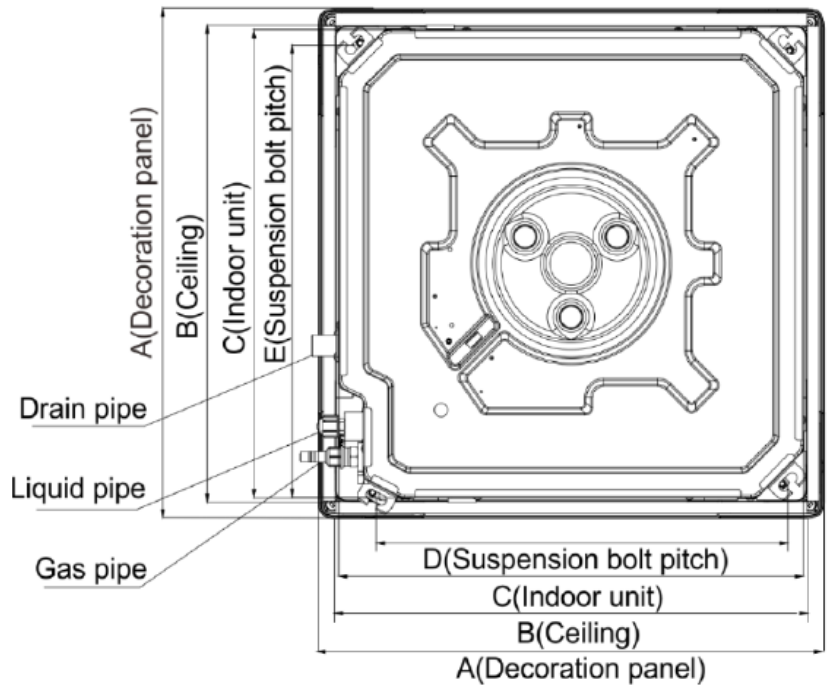

|          | mm  | in    |
|----------|-----|-------|
| <b>A</b> | 620 | 24.41 |
| <b>B</b> | 580 | 22.83 |
| <b>C</b> | 570 | 22.44 |
| <b>D</b> | 505 | 19.88 |
| <b>E</b> | 550 | 21.65 |
| <b>F</b> | 295 | 11.61 |
| <b>G</b> | 171 | 6.73  |

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency. ©2019 Lennox Industries Inc.